

Getting Started

Let's have a look at what you need to download and install to start writing a game using PunyInform. For this article, I will be using Windows, but you can also use PunyInform on Mac or Linux.

Step 1: Install the PunyInform library

Go to <https://github.com/johanberntsson/PunyInform/releases> and download the newest version of PunyInform (the version that comes first on the page) by clicking on "Source code (zip)" under Assets. When it has finished downloading, click on the Zip archive in your browser window to open the archive in Windows Explorer, click on "Extract All" near the top of the window, just below the menu bar. Pick a folder where you want to place the PunyInform files. Windows Explorer will probably suggest something like "C:\Users\MyUsername\Downloads\PunyInform-1_2\" and that should work fine. You can always rename and/or move the folder later.

Step 2: Get the compiler

PunyInform is a library for the Inform 6 programming language. To use it, you will need to download the compiler, called "inform" or "inform6". PunyInform requires at least version 6.35 of the compiler. If you use Windows, it's available as a binary executable, so you can just download it and start to use it. Go to <https://www.ifarchive.org/indexes/ifarchive/infocom/compilers/inform6/executables/> and download `inform635_win32.zip`.


Open the Zip archive and extract the file (there is just one) in the base folder of PunyInform (the folder which has the subfolders "documentation" and "lib" in it). This is what your PunyInform folder may look like now:

Name	Size	Comment
documentation		Documentation for PunyInform.
lib		The library files - the core of PunyInform.
.vimrc	1 kB	Settings for the Vim text editor.
cloak.inf	5 kB	Source code for the demo game Cloak of Darkness.
inform6.exe	487 kB	The Inform 6 compiler.
library_of_horror.inf	29 kB	Source code for the demo game Library of Horror.
LICENSE	2 kB	License details for PunyInform.
minimal.inf	2 kB	A starting point for writing your own PunyInform game.
nada.inf	1 kB	Source code for an absolutely minimal PunyInform "game".
README.md	3 kB	Readme file for PunyInform.
releasenotes.txt	2 kB	Information on what has been changed in each new version of PunyInform.
testbench.inf	98 kB	Source code for a haphazard collection of rooms and objects, used for testing.
testlights.inf	4 kB	Source code for a small "game" where one can explore light and darkness.

Step 3: Install a Z-code interpreter

While the real selling point for PunyInform is that it allows you to write games that are fast enough and small enough to be played on 8-bits, the games produced will be equally playable on pretty much any computer, and you will soon find that you can do most of the testing on your modern PC. To do this you will need a Z-code interpreter.

PunyInform compiles Inform 6 source code to Z-code, a game format invented by the text adventure wizards at Infocom. A Z-code file is in fact a memory image for a virtual/imaginary computer called the Z-machine. While the Z-machine doesn't physically exist, it can be emulated on a wide array of platforms, including the 8-bit computers of the eighties, but also 16-bit computers like Commodore Amiga and Atari ST, as well as computers running MS-DOS, any flavour of Windows, Mac OS, Unix, Linux, Android – you name it. It just takes a Z-code interpreter (an emulator for the Z-machine) for that platform. There is a very popular interpreter called Frotz, which has been ported to many different platforms. For Windows, I recommend you get Windows Frotz.

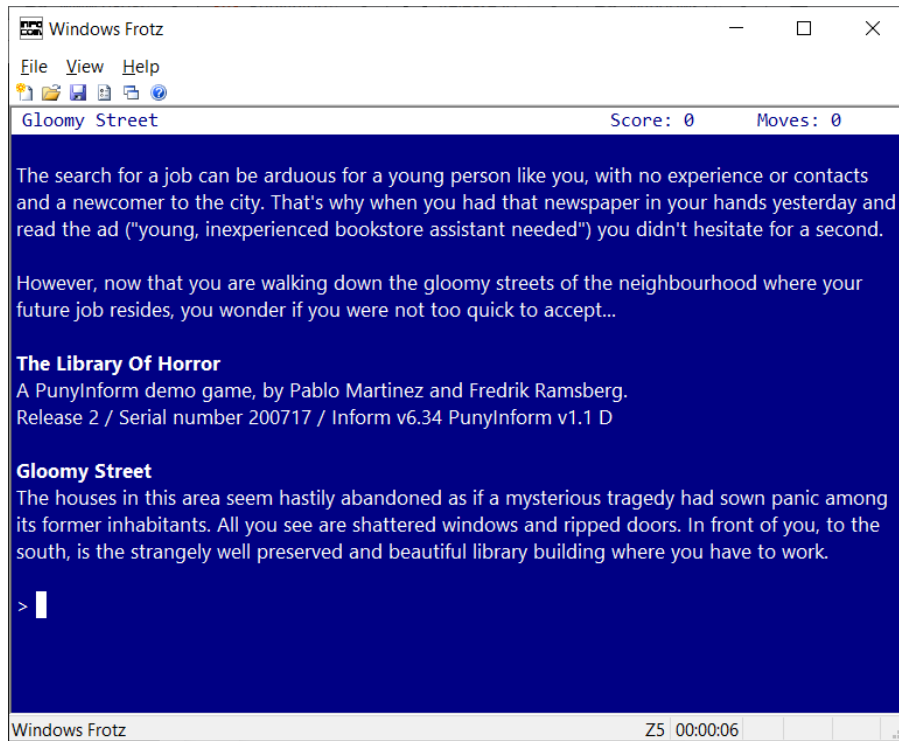

Go to <http://www.davidkinder.co.uk/frotz.html> , download Windows Frotz and run the installer. Then start Windows Frotz once, to make sure it has set file type associations properly.

Step 4: Start writing your first game

In Windows Explorer, make a copy of the file `minimal.inf` and call it `mygame.inf`. Then open `mygame.inf` in Notepad (or some text editor you prefer – if you want something really nice, you can get the Atom text editor and install the package “language-inform6” under File -> Settings).

The file `mygame.inf` should now look something like this:

```
!% --S
!% $OMIT_UNUSED_ROUTINES=1
! The very first lines of the main source code file for a game can
! contain compiler options, like the two lines above.
! --S disables strict error checking. This is otherwise used in z5
!     and z8 games by default. While useful for debugging, it adds
!     ~10 KB to the story file size and it makes the game slower.
! $OMIT_UNUSED_ROUTINES=1 makes the compiler remove all routines
!     which aren't used. This can save some space.
```

```

Constant Story      "Minimal";
Constant Headline   "^A sample game which uses PunyInform.^";

! Uncomment ONE of the two following lines, to show either time or
! score/turns. Leaving both commented out makes the library bigger.
!Constant STATUSLINE_TIME; Statusline time;
Constant STATUSLINE_SCORE; Statusline score;

! Uncomment to add optional features to PunyLib
!Constant DEBUG;
!Constant CUSTOM_ABBREVIATIONS;
Constant OPTIONAL_NO_DARKNESS;
!Constant OPTIONAL_ALLOW_WRITTEN_NUMBERS;
!Constant OPTIONAL_EXTENDED_METAVERBS;
!Constant OPTIONAL_EXTENDED_VERBSET;
!Constant OPTIONAL_PRINT_SCENERY_CONTENTS;
!Constant OPTIONAL_FULL_SCORE;
!Constant OPTIONAL_FULL_DIRECTIONS;
!Constant OPTIONAL_SIMPLE_DOORS;
!Constant OPTIONAL_SHIP_DIRECTIONS;
!Constant OPTIONAL_GUESS_MISSING_NOUN;
!Constant OPTIONAL_MANUAL_SCOPE;
!Constant OPTIONAL_ORDERED_TIMERS;
!Constant RUNTIME_ERRORS = 0;

! Define any library constants you need here, like MAX_SCORE,
! AMUSING_PROVIDED, MAX_CARRIED, SACK_OBJECT, etc.

Constant INITIAL_LOCATION_VALUE = Library;

Include "globals.h";

! Define your own global variables here, if any

! Define the entry point routines you need here, like
! Amusing, DarkToDark etc.

! Uncomment to add PunyLib extensions
!Include "ext_menu.h";
!Include "ext_flags.h";
!Include "ext_quote_box.h";
!Include "ext_cheap_scenery.h";

Include "puny.h";

```

```

! Uncomment to add PunyLib extensions
!Include "ext_waittime.h";

Object Library "The Library"
  with
    description "You are in a library.";

Object -> Box "box"
  with
    name 'box',
    inside_description "It feels so nice, standing in the box.",
    has container open openable enterable;

[Initialise;
  print "^^And so the story begins...^^";
];

```

Now change the text in the line which starts with Constant Headline (Line 9 from the top). Change A sample game to This is my first game or something else you find amusing. Save the file.

Step 5: Compile the game

Start a command prompt (In Windows 10, click the Windows Start icon on the Windows menu bar and type cmd , then click on Command Prompt.)

Now use the command CD to go to the base folder of PunyInform. If it's on a different device, you can type the device letter and ":" to switch to that device first, like D: and then CD to go to the right folder. CD .. goes up one level and CD \ (that's a backslash character) goes to the root folder on the current device. If you start writing a folder name, you can press the TAB key multiple times to see all files and folders with a matching name. Use DIR to list the files in the current folder.

```
Command Prompt
C:\Users\Fredrik>cd Downloads
C:\Users\Fredrik\Downloads>cd PunyInform-1_1
C:\Users\Fredrik\Downloads\PunyInform-1_1>cd PunyInform-1_1
C:\Users\Fredrik\Downloads\PunyInform-1_1\PunyInform-1_1>dir
Volume in drive C is Windows
Volume Serial Number is 8467-6A0F

Directory of C:\Users\Fredrik\Downloads\PunyInform-1_1\PunyInform-1_1

2020-07-17  23:33    <DIR>          .
2020-07-17  23:33    <DIR>          ..
2020-07-17  20:57             93  .vimrc
2020-07-17  20:57          4 854  cloak.inf
2020-07-17  20:57    <DIR>          documentation
2020-07-17  20:59        498 688  inform6.exe
2020-07-17  20:57    <DIR>          lib
2020-07-17  20:57          29 148  library_of_horror.inf
2020-07-17  20:57           1 093  LICENSE
2020-07-17  20:57           1 406  minimal.inf
2020-07-17  22:47           1 535  mygame.inf
2020-07-17  20:57           788  nada.inf
2020-07-17  20:57           2 499  README.md
2020-07-17  20:57           1 271  releasenotes.txt
2020-07-17  20:57          99 649  testbench.inf
2020-07-17  20:57           3 254  testlights.inf
                12 File(s)          644 278 bytes
                4 Dir(s)  332 798 042 112 bytes free

C:\Users\Fredrik\Downloads\PunyInform-1_1\PunyInform-1_1>
```


Now, to compile your source code, type:

```
inform6 -v3 +lib mygame
```

This tells the Inform 6 compiler to read the source code in `mygame.inf` and compile it into a Z-code version 3 file (a so-called “story file”) called `mygame.z3`, and to look for library files in the folder `lib`. There are many more commandline switches available for the Inform 6 compiler. To list them all, type `inform6 -h2`. Most of the time, when using PunyInform, I find myself using the commandline switches `-e` (to use string abbreviations, making the story file smaller) and `-s` (to print some statistics on the story file produced).

Step 6: Start your game in Windows Frotz

Now use Windows Explorer to go to the PunyInform base folder. You should see `mygame.z3` there. Double-click it. The game should now launch in Windows Frotz.

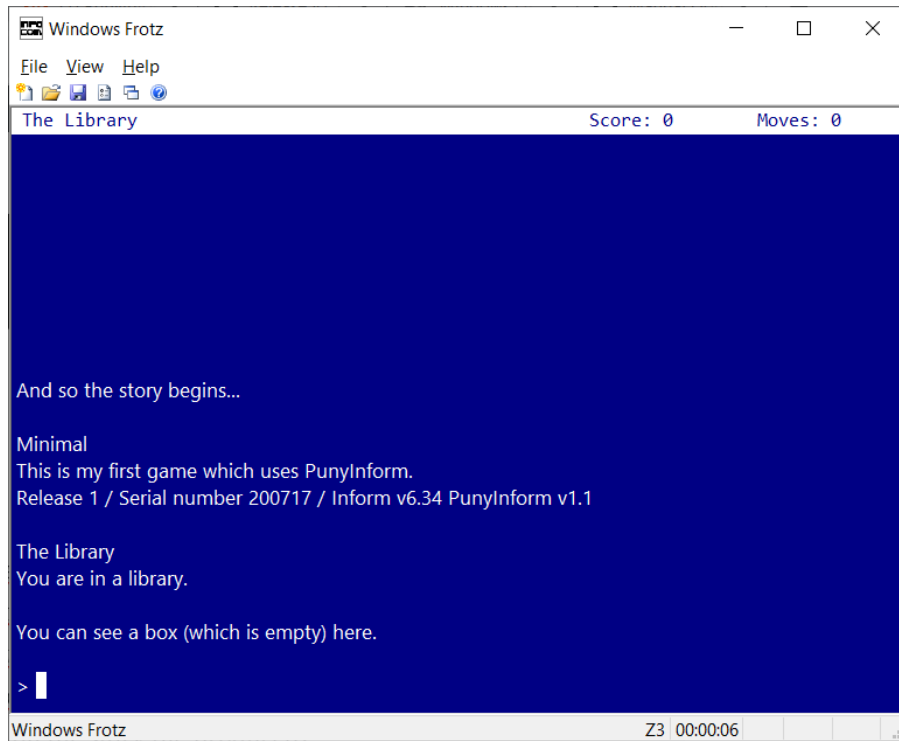

Step 7: Turn your game into a C64 disk image

Now let's make a Commodore 64 version of your game. To do this, we will bundle the story file with a Z-code interpreter called Ozmo. Go to <http://microheaven.com/ozmoonline/>. Under "Upload Z-code file", pick the file mygame.z3 and click "Upload". Then, under Build game, make sure the story file mygame.z3 is selected, then scroll to the bottom of the page and click "Build". If all goes well, you get a message that the game was successfully built, and under Files you can see mygame.d64. Click on the filename to download the file.

Step 8: Test your game on an (emulated) C64

If you don't have a Commodore 64 emulator installed already, this should get you going.

Download WinVICE from <https://vice-emu.sourceforge.io/index.html#download> and unzip it in a folder of your choice. You may need to install 7-Zip to unzip WinVICE. Then go to this folder in Windows Explorer and double-click x64sc.exe. Click File -> Attach disk image -> Drive #8 and point to mygame.d64. Then type `load"*",8` and press enter. If you get tired of the (realistic) loading time,

you can press Alt-W to toggle warp mode (maximum speed). When the game has finished loading, make sure warp mode is turned off, type run and press enter. The game now decompresses and then it starts.

